


Prepared For:

Anheuser- Busch
 Julie Smith
 1 Busch Pl.
 Saint Louis, MO 63118-1852
 (314)765 - 2777
 Reference ID: Drop Frame 26k

Presented By:

RUSH TRK CTR OF MO
 Dennis Marudas
 3101 INDUST. PARK PL. W
 SAINT PETERS MO 63376 - 5947
 (314)449-7212

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

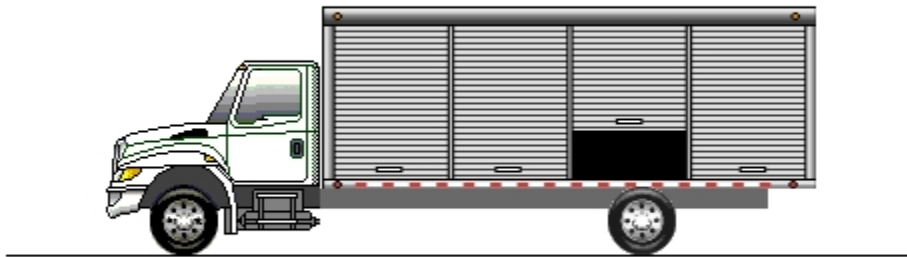

Model Profile
2021 MV607 SBA (MV607)

AXLE CONFIG:	4X2
APPLICATION:	Beverage
MISSION:	Requested GVWR: 26000. Calc. GVWR: 26000 Calc. Start / Grade Ability: 30.96% / 1.94% @ 55 MPH Calc. Geared Speed: 79.7 MPH
DIMENSION:	Wheelbase: 228.00, CA: 160.90, Axle to Frame: 63.00
ENGINE, DIESEL:	{Cummins B6.7 240} EPA 2017, 240HP @ 2400 RPM, 560 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 240 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 2500 HS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-09-122A} I-Beam Type, 9,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends Gear Ratio: 6.14
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(4) 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, SINGLE:	{International IROS} 20,000-lb Capacity, 9.25" Ride Height, with Shock Absorbers
PAINT:	Cab schematic 100WP Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
MV60700	Base Chassis, Model MV607 SBA with 228.00 Wheelbase, 160.90 CA, and 63.00 Axle to Frame.
1570	TOW HOOK, FRONT (2) Frame Mounted
1ANA	AXLE CONFIGURATION {Navistar} 4x2
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CBE	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 420.0" (10668mm) Maximum OAL; for Drop Frame Beverage Application Only
1LEG	LICENSE PLATE HOLDER Includes Upper & Lower Mounting Plate Hardware, Mounted in Existing Holes in Front Bumper
1LLD	BUMPER, FRONT Contoured, Steel
1WEJ	WHEELBASE RANGE 199" (505cm) Through and Including 254" (645cm)
2ATL	AXLE, FRONT NON-DRIVING {Meritor MFS-09-122A} I-Beam Type, 9,000-lb Capacity
3AGW	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 9,000-lb Capacity, with Shock Absorbers
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic (with Air Cam Brakes) : SLACK ADJUSTERS, REAR Automatic (with Air Cam Brakes) : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4732	DRAIN VALVE {Berg} with Pull Chain, for Air Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System
4EBT	AIR DRYER {Bendix AD-IP} with Heater
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 SqIn
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake
4JCH	BRAKES, FRONT, AIR CAM S-Cam; 15.0" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VGA	AIR DRYER LOCATION Mounted Outside Right Rail, Forward of Front Wheel
4VJE	AIR TANK LOCATION (2) Mounted Inline Under Left Rail, Back of Cab
5AAA	STEERING COLUMN Stationary
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSA	STEERING GEAR {Sheppard M100} Power

<u>Code</u>	<u>Description</u>
6DGG	DRIVELINE SYSTEM {Dana Spicer} 1710, for 4x2/6x2
7BEV	AFTERTREATMENT COVER Steel, Black
7BKS	EXHAUST SYSTEM Single, Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7WAZ	TAIL PIPE (1) Turnback Type
7WCR	EXHAUST HEIGHT 10' 11"
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXD	ALTERNATOR {Leece-Neville AV1160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, with Remote Sense
8HAB	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RMP	RADIO AM/FM/WB/Clock/Auxiliary Input
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8VAY	HORN, ELECTRIC Disc Style
8WEB	SPECIAL WIRING HARNESS, BODY for Chassis, with 6' Additional Length to Accommodate Drop Frame Beverage Body Application
8WEG	TURN SIGNAL SWITCH Non-Canceling
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm
8WZK	HEADLIGHTS Halogen, Composite Aero Design
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XDU	BATTERY BOX Steel, with Aluminum Cover, 14" Wide, 2-3 Battery Capacity, Mounted Left Side Under Cab
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
8XKL	STARTING MOTOR {Mitsubishi Electric Automotive America 90P47} 12-Volt, with Soft-Start
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges

<u>Code</u>	<u>Description</u>
9HAD	GRILLE Chrome
9WAY	FRONT END Tilting, Fiberglass, with Three Piece Construction
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WP"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10NPW	SPECIAL RATING, GVWR Limited to 26,000-lb GVWR
10WCY	SAFETY TRIANGLES
10WEX	SPECIAL BODY MODIFICATIONS for use with Beverage Body/Drop Frame Truck Application, Allows for After Market Beverage Truck/Drop Frame Modification
10WUE	MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12EJN	ENGINE, DIESEL {Cummins B6.7 240} EPA 2017, 240HP @ 2400 RPM, 560 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 240 Peak HP (Max)
12EMZ	VENDOR WARRANTY, ENGINE {Cummins} B6.7 Engine, 3-Year Unlimited Miles Standard Warranty
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On
	<u>Includes</u> : FAN Nylon
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, with 313 SqIn Charge Air Cooler. with In-Tank Transmission Cooler
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12VBR	AIR CLEANER with Service Protection Element
12VHH	FEDERAL EMISSIONS {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2020
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12WPV	OIL PAN 15 Quart Capacity, For Cummins ISB/B6.7 Engines
12WZJ	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door
13ATD	TRANSMISSION, AUTOMATIC {Allison 2500 HS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max
13WLN	TRANSMISSION OIL Synthetic; 20 thru 28 Pints
13WVS	TRANSMISSION SHIFT CONTROL T-Handle
13WVW	NEUTRAL AT STOP OMIT
13WYY	SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming
14ANP	AXLE, REAR, SINGLE {Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 6.14

<u>Code</u>	<u>Description</u>
14TBJ	SUSPENSION, REAR, AIR, SINGLE {International IROS} 20,000-lb Capacity, 9.25" Ride Height, with Shock Absorbers
14WMG	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 30 thru 39.99 Pints
15LMS	FUEL/WATER SEPARATOR 12 VDC Electric Heater, Includes Pre-Heater, Includes Water-in-Fuel Sensor, Cummins Supplied on Engine
15SXJ	FUEL TANK Top Draw, Non-Polished Aluminum, 24" Dia, 50 US Gal (189L), Mounted Left Side, Under Cab
15WCN	DEF TANK 5 US Gal (19L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
	<u>Includes</u> : CLEARANCE/MARKER LIGHTS (5) Flush Mounted
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16KAV	SEAT, DRIVER {National} Non-Suspension, High Back with Integral Head Rest, Vinyl, with Fixed Back
16SEE	GRAB HANDLE, EXTERIOR Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left Side at B-Pillar
16SMN	SEAT, PASSENGER {National} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"
16VCC	SEAT BELT All Orange; 1 to 3
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VLK	CAB REAR SUSPENSION Air Suspension, for Mid Cab Height
16WSE	LOW WASHER FLUID INDICATOR
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DUW	WHEELS, FRONT {Accuride 51408} DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DUW	WHEELS, REAR {Accuride 51408} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

<u>Code</u>	<u>Description</u>
29580	WHEEL SEALS, FRONT {International} Oil-Lubricated Wheel Bearings
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil
7372135809	(2) TIRE, FRONT 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
7372135810	(4) TIRE, REAR 11R22.5 Load Range G DH37 (HANKOOK), 498 rev/mile, 75 MPH, Drive

Services Section:

40129	WARRANTY Standard for MV Series, Effective with Vehicles Built July 1, 2017 or Later, CTS-2020A
-------	---

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Net Sales Price:		\$63,768.04

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.